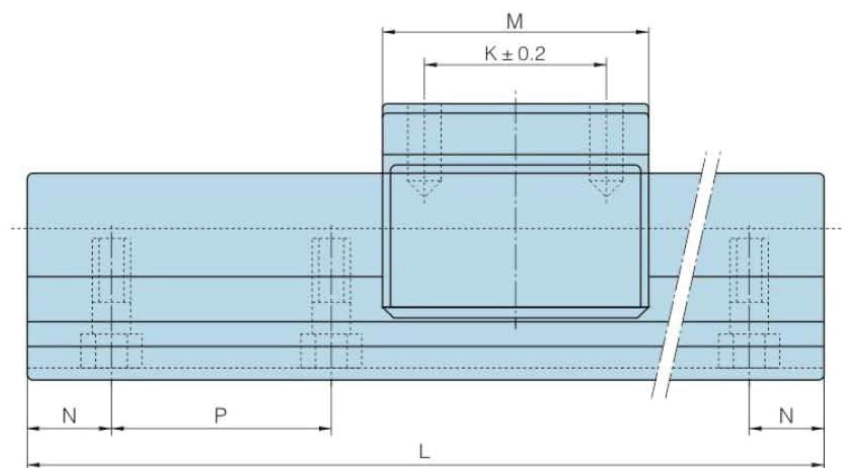
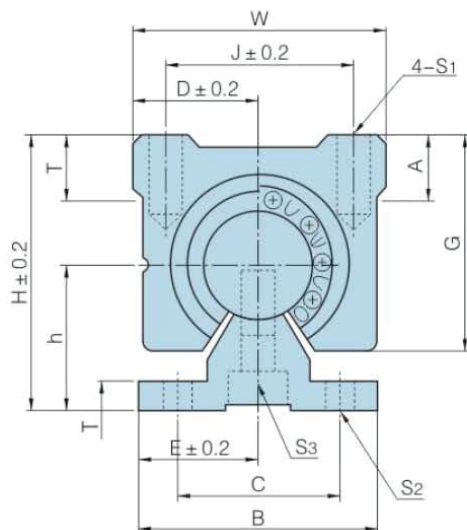


Eixo Suportado T (Trilho em T)

		CN	Co N	(kgf)	(kgf/m)	D	h	H	E	W	G	A	B	T	M	S3	J	K	S2	C	S1	P
SBR12UU	Ø12	600	1020	0.1	1.6	20.5	22.5	40	15	41	28	9	30	4	39	M4 x 16	28	26	Ø 4	22	M5	100
SBR16UU	Ø16	770	1170	0.15	2.55	22.5	25	45	50	45	33	9	40	5	45	M6 x 20	32	30	Ø5.5	25	M5	150
SBR20UU	Ø20	860	1370	0.20	3.50	24	27	50	22.5	48	39	11	45	5	50	M6 x 20	35	35	Ø5.5	27	M6	150
SBR25UU	Ø25	980	1560	0.45	5.30	30	38	60	27.5	50	47	14	55	6	65	M6 x 25	40	40	Ø6.6	38	M6	200
SBR30UU	Ø30	1560	2740	0.63	7.4	35	37	70	30	70	56	15	60	7	70	M8 x 30	50	50	Ø6.6	37	M8	200
SBR35UU	Ø35	1660	3130	0.95	10.05	40	43	80	32.5	80	63	18	65	8	80	M8 x 35	55	55	Ø9	43	M8	200
SBR40UU	Ø40	2150	4010	1.33	13.10	45	48	90	37.5	90	72	20	75	9	90	M8 x 40	65	65	Ø9	48	M10	200
SBR50UU	Ø50	3820	7930	3.00	20.65	60	62	115	47.5	120	90	25	90	11	110	M10 x 50	94	80	Ø11	62	M10	200

CN: Carga Dinâmica

Co N: Carga Estática