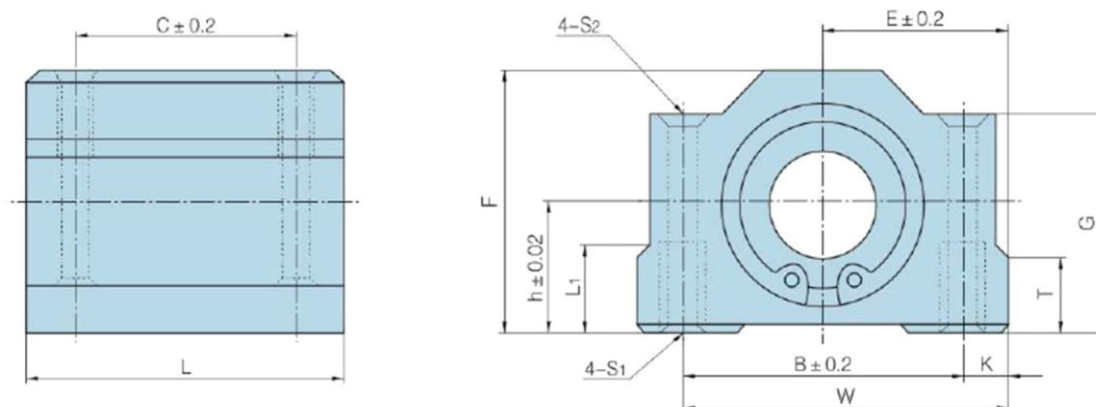
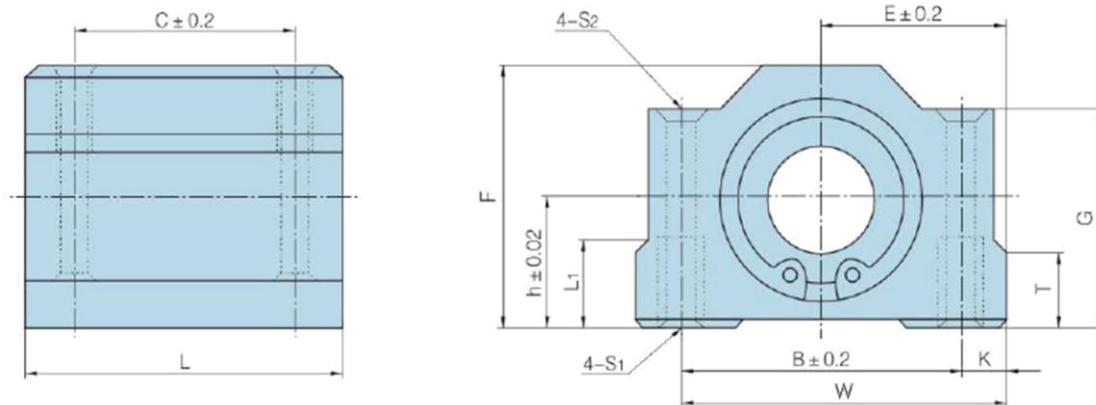


Pillow Block Fechado (SCS.UU)

	T	h	E	W	L	F	G	B	C	K	S1	S2	L1	CN	Co N
SCS6UU	6	9	15	30	25	18	15	20	15	5	M4	3.4	8	206	265
SCS8UU	6	11	17	34	30	22	18	24	18	5	M4	3.4	8	274	392
SCS10UU	8	13	20	40	35	26	21	28	21	6	M5	4.3	12	372	549
SCS12UU	8	15	21	42	36	28	24	30.5	26	5.75	M5	4.3	12	510	784
SCS13UU	8	15	22	44	39	30	24.5	33	26	5.5	M5	4.3	12	510	784
SCS16UU	9	19	25	50	44	38.5	32.5	36	34	7	M5	4.3	12	774	1180
SCS20UU	11	21	27	54	50	41	35	40	40	7	M6	5.2	12	882	1370
SCS25UU	12	26	38	76	67	51.5	42	54	50	11	M8	7	18	980	1570
SCS30UU	15	30	39	78	72	59.5	49	58	58	10	M8	7	18	1570	2740
SCS35UU	18	34	45	90	80	68	54	70	60	10	M8	7	18	1670	3140
SCS40UU	20	40	51	102	90	78	62	80	60	11	M10	8.7	25	2160	4020
SCS50UU	25	52	61	122	110	102	80	100	80	11	M10	8.7	25	3820	7940
SCS60UU	30	58	66	132	122	114	94	108	90	12	M10	10.7	25	4700	10000

CN: Carga Dinâmica

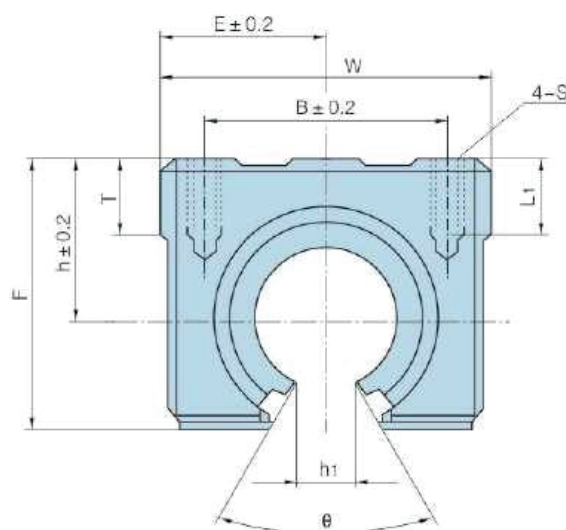
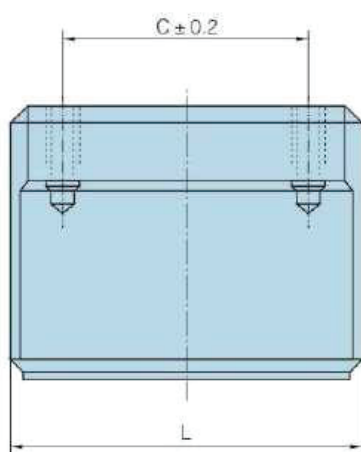

Co N: Carga Estática

Pillow Block Fechado Alongado (SCS..LUU)

	T	h	E	W	L	F	G	B	C	K	S1	S2	L1	CN	Co N
SCS8LUU	6	11	17	34	58	22	18	24	42	5	M4	3.4	8	274	392
SCS10LUU	8	13	20	40	68	26	21	28	45	6	M5	4.3	12	372	549
SCS12LUU	8	15	21	42	70	28	24	30.5	50	5.75	M5	4.3	12	510	784
SCS13LUU	8	15	22	44	75	30	24.5	33	50	5.5	M5	4.3	12	510	784
SCS16LUU	9	19	25	50	85	38.5	32.5	36	60	7	M5	4.3	12	774	1180
SCS20LUU	11	21	27	54	96	41	35	40	70	7	M6	5.2	12	882	1370
SCS25LUU	12	26	38	76	130	51.5	42	54	100	11	M8	7	18	980	1570
SCS30LUU	15	30	39	78	140	59.5	49	58	110	10	M8	7	18	1570	2740
SCS35LUU	18	34	45	90	155	68	54	70	120	10	M8	7	18	1670	3140
SCS40LUU	20	40	51	102	175	78	62	80	140	11	M10	8.7	25	2160	4020
SCS50LUU	25	52	61	122	215	102	80	100	160	11	M10	8.7	25	3820	7940
SCS60LUU	30	58	66	132	240	114	94	108	180	12	M10	10.7	25	4700	10000

CN: Carga Dinâmica

Co N: Carga Estática

Pillow Block Aberto (SBR..UU)

	h	E	W	L	F	h1	∅	B	C	S	L1	T		CN	Co N	(g)
SBR12UU	17.5	20.5	41	39	27	7.5	80°	28	26	M5	10	9	LM12UU-OP	420	610	100
SBR13UU	17	20	40	39	27.6	8.5	80°	28	28	M5	10	8	LM13UU-OP	510	784	100
SBR16UU	20	22.5	45	45	33	10	80°	32	30	M5	12	9	LM16UU-OP	774	1180	150
SBR20UU	23	24	48	50	39	10	60°	35	35	M6	12	11	LM20UU-OP	882	1370	200
SBR25UU	27	30	60	65	47	11.5	50°	40	40	M6	12	14	LM25UU-OP	980	1570	450
SBR30UU	33	35	70	70	56	14	50°	50	50	M8	18	15	LM30UU-OP	1570	2740	630
SBR35UU	37	40	80	80	63	16	50°	55	55	M8	18	18	LM35UU-OP	1670	3140	925
SBR40UU	42	45	90	90	72	19	50°	65	65	M10	20	20	LM40UU-OP	2160	4020	1330
SBR50UU	53	60	120	110	92	23	50°	94	80	M10	20	25	LM50UU-OP	3820	7940	3000

CN: Carga Dinâmica

Co N: Carga Estática